



## 5 Advanced Monitoring


- Master-slave configuration – monitor and control multiple separate Xanbus or RS485 networks
- Modbus – master functionality – basic monitoring for supported Modbus devices such as power meters and grid-tie inverters
- Monitor & control new Conext battery monitor device
- Daily Summary Plots – view daily rolling plots (up to 7 days) for key system parameters, like battery current, voltage and SOC%
- Conext Insight – Web Portal Remote Monitoring



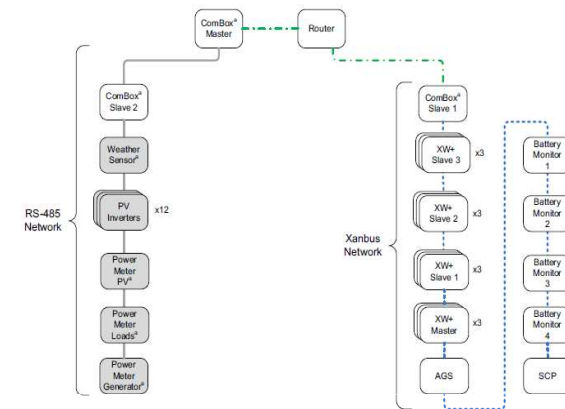

# Master-Slave Configuration


Monitor slave ComBoxes on Xanbus and RS485 with one master ComBox

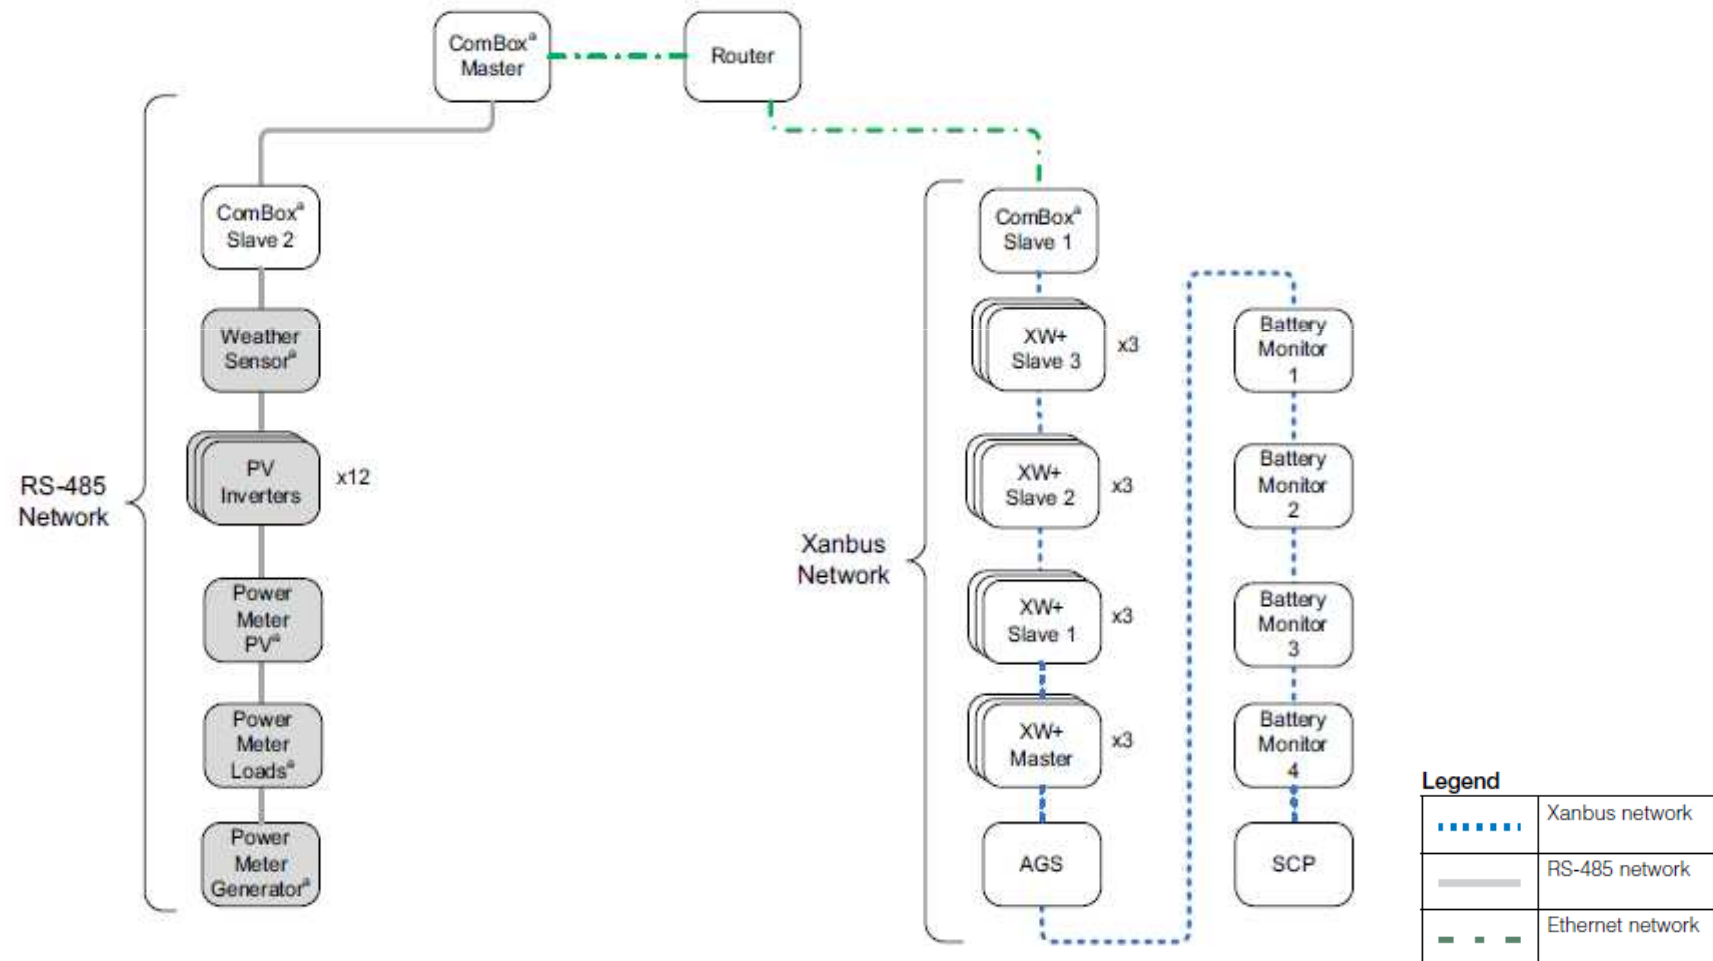



# Modbus-Master Configuration

Monitor multiple supported Modbus devices with one ComBox

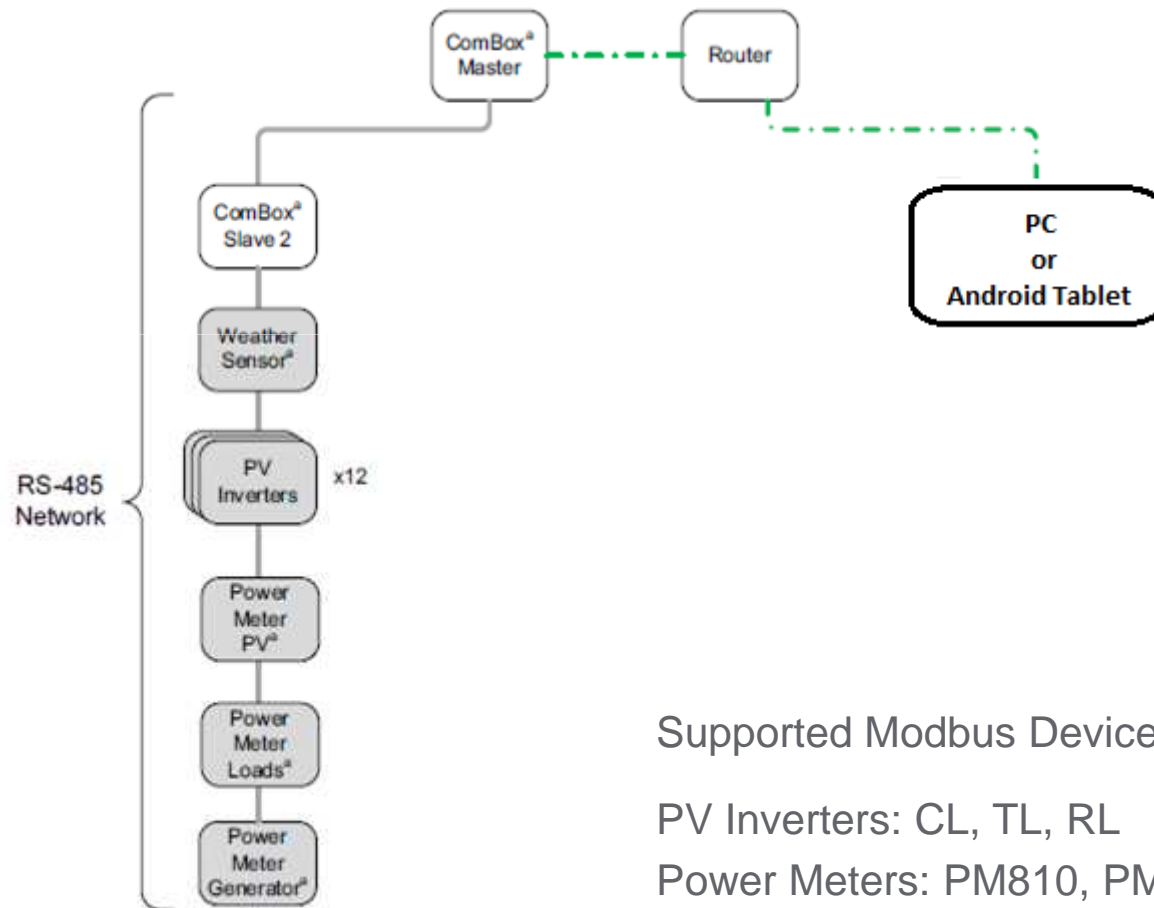

Supported Modbus Devices:

PV Inverters: CL, TL, RL

Power Meters: PM810, PM820, PM850, PM870

Weather Sensor: Kipp & Zonen SMP3 Pyranometer